



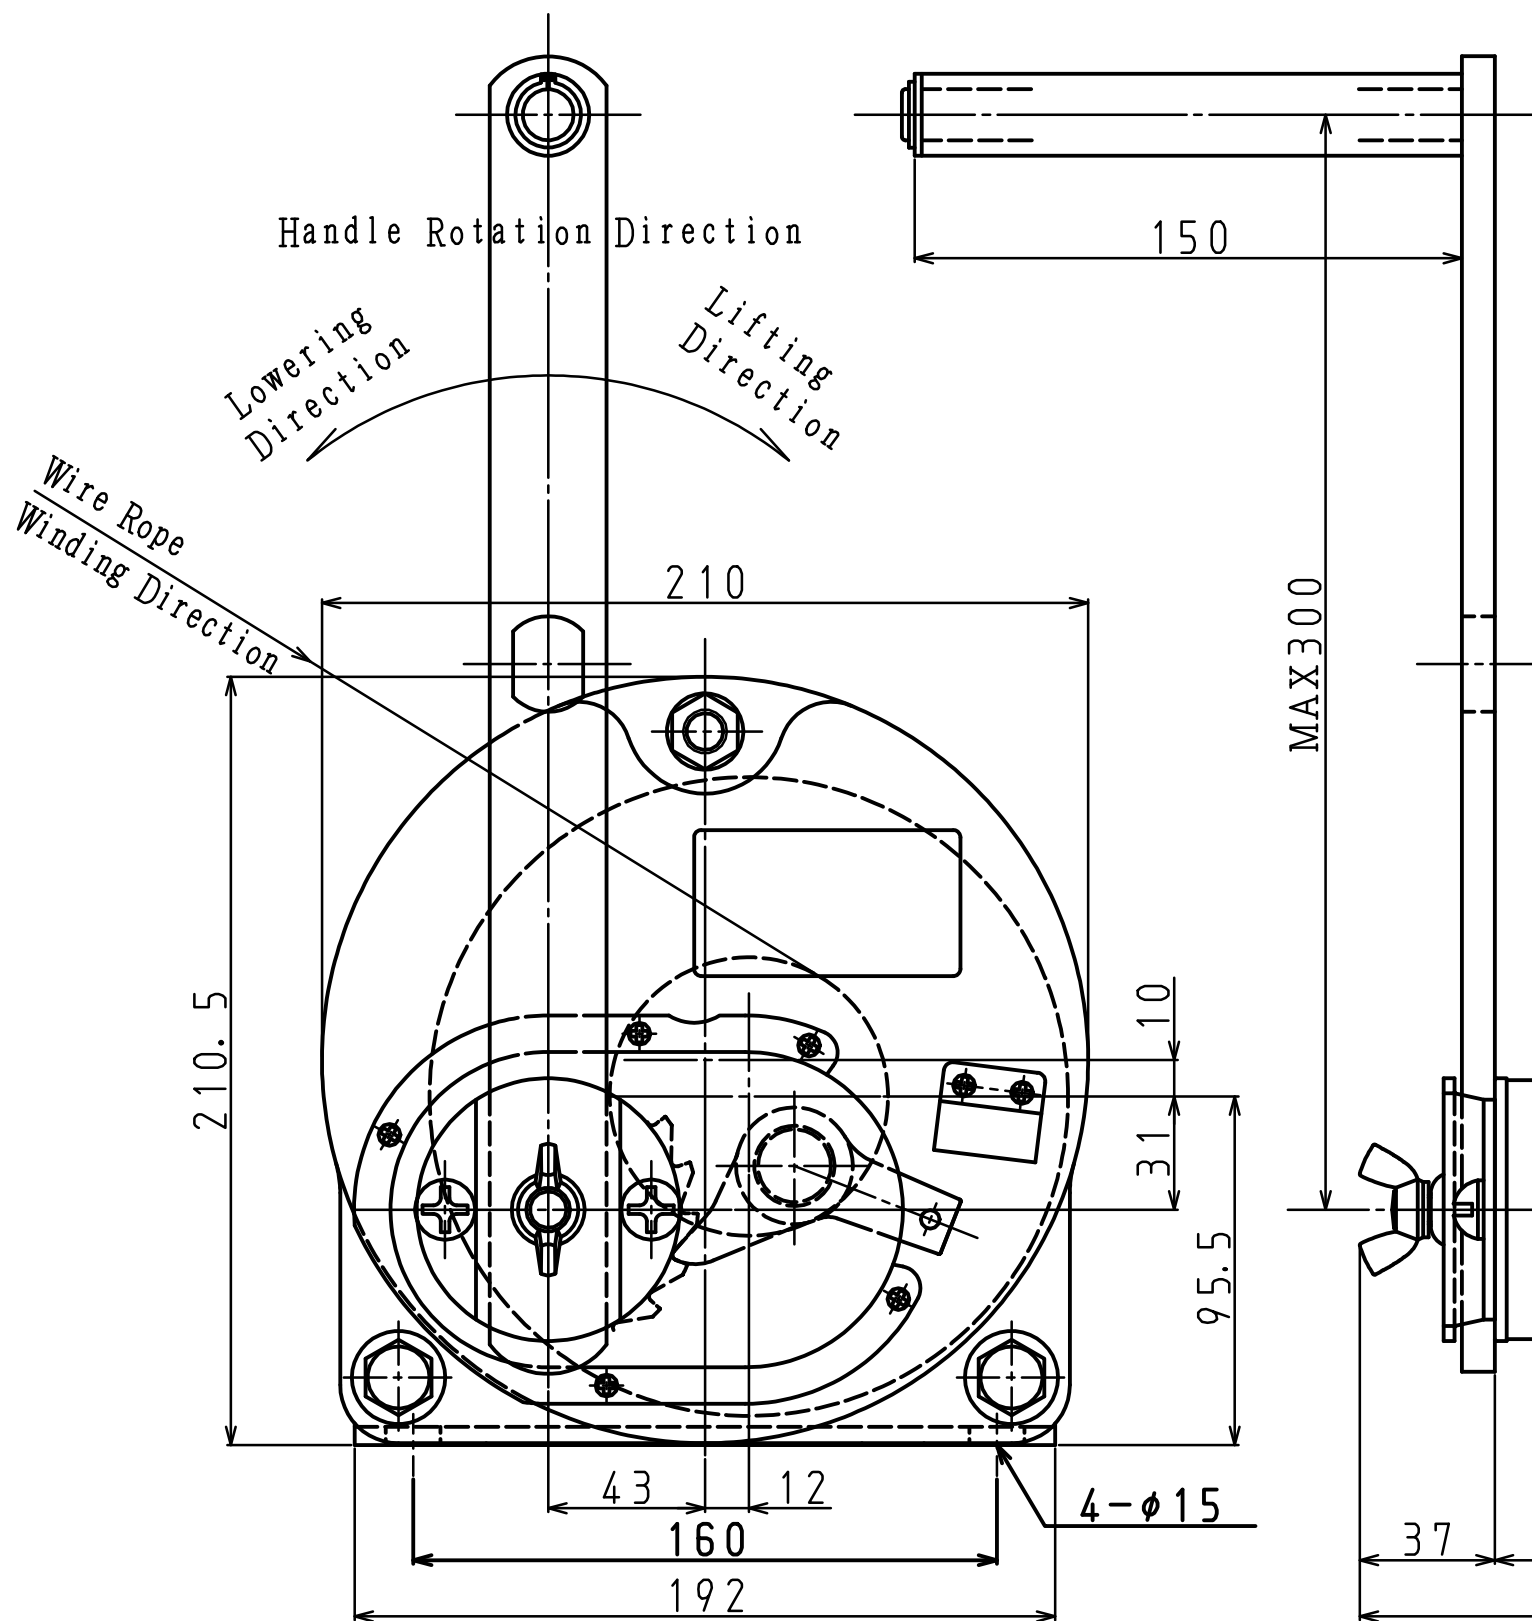

REVISION	..				
1	x	..		1	x
2	x	..		2	x

It is necessary the fleet angle is 2 degrees or less to prevent the wire rope being unevenly wound to wind the wire rope uniformly.
Please install the pulley 2550mm or more away from the drum on the drum center line.

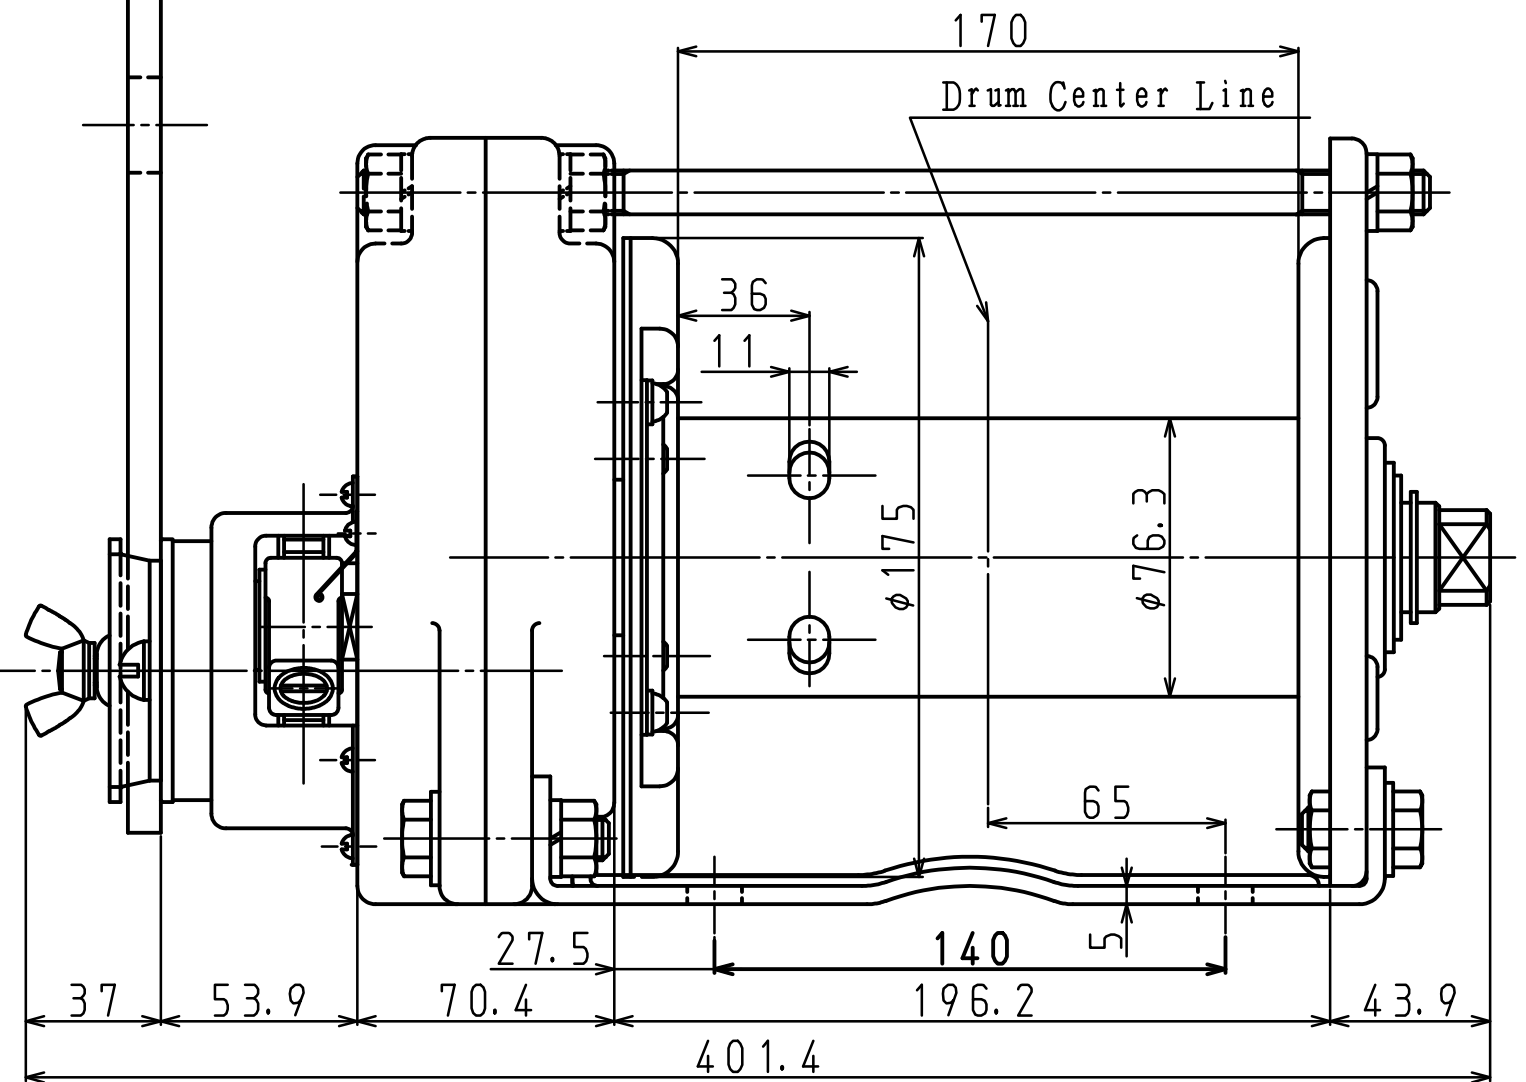

Specifications				(The wire rope composition is a manufacturer recommendation.)	
Model	GM-10	Handle	Handle Length 300mm	1st Layer	133N (=13.5kgf)
Load Rating	9,800N (=1,000kgf)	Operation	Wire Rope Tension 9,800N	2nd Layer	157N (=16.0kgf)
Wire Rope Tension	(3rd Layer or Less)	Power		3rd Layer	182N (=18.5kgf)
Wire Rope Length	φ8mm (6×37)×35m (5th Layer)	Weight (Winch+Handle)			16.4 kg
Gear Ratio	1/12.6	Standard Accessories			One Handle
Handle Length	300mm (Effective Max)				One Hex Wrench for Wire Lock

MARK	PARTICULARS	MATERIAL	TEST PIECE	WORKING NO. REQUIRED (PER)	TOTAL	PER ONE TOTAL WEIGHT IN g	REMARKS
MANAGER						WORK NO.	QUANTITY
DEPUTY MANAGER							
CHIEF	I. Takahashi					CLASSIFICATION	SCALE
ENG'R IN CHARGE		MAXPULL WINCH					/
CHECKED BY						DRAWING NO.	
DRAWN BY	T. Yonezawa	MODEL GM-10				GM10-101201-01E	
DATE DRAWN	2010/12/01						
MAXPULL MACHINERY & ENGINEERING CO., LTD.							