



Type MI 230

2-way solenoid valve
servo actuated, bistable



Application
Neutral liquids, gases
and vapors



Type/ Order No.	Orifice [mm]	Port size	Pressure range [bar]		kv-value [m³/h]	Weight [kg]
			AC	DC		
MI 230-001	8,0	G1/4	-	0,5 - 8	0,85	0,45

Sealing material: P (NBR) E (EPDM) V (FPM)



Body material: Brass / POM
Inner parts: Stainless steel (1.4105)
Mounting direction: Free, preferred upwards
Max. ambient temp.: 50 °C
Viscosity of the medium: max. 21 mm²/s (3 °E)
Static pressure: max. 10 bar
Standard voltage: DC: 24 V, 12 V, 9 V, 6 V

Power consumption: 2,5 W
Pulse duration: 30 ms
Voltage tolerance: -15%... +10%
Operating frequency: max. 30/min
Degree of Protection: IP 54 (EN 60529)

Other configurations upon request

The right to modification is reserved

staiger

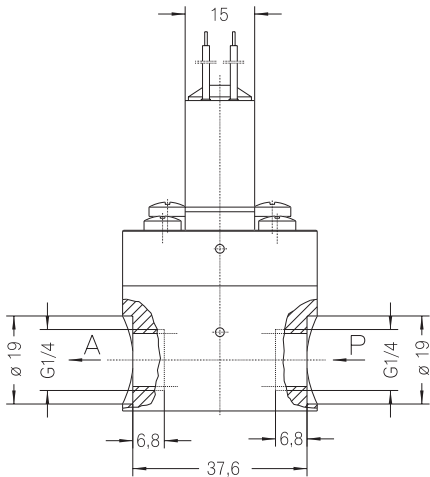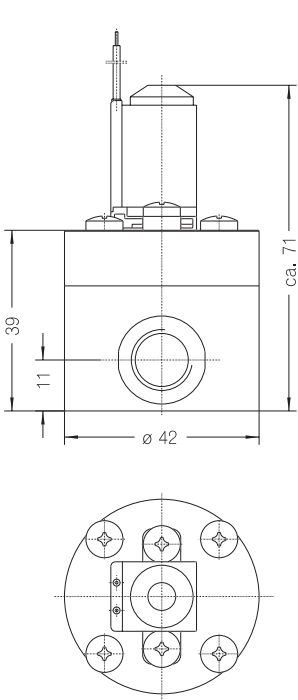

Dimensions in mm